



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

Publication number:

**0 112 577**  
**A1**

**EUROPEAN PATENT APPLICATION**

Application number: **83113121.4**

Int. Cl.<sup>3</sup>: **H 01 F 1/26, H 01 F 41/02**

Date of filing: **27.12.83**

Priority: **27.12.82 JP 226738/82**  
**08.07.83 JP 124408/83**

Applicant: **TOKYO SHIBAURA DENKI KABUSHIKI KAISHA, 72, Horikawa-cho Saiwai-ku, Kawasaki-shi Kanagawa-ken 210 (JP)**

Date of publication of application: **04.07.84**  
Bulletin **84/27**


Inventor: **Horie, Hiromichi, c/o Tokyo Shibaura Denki K.K. 72, Horikawa-cho, Saiwai-ku Kawasaki-shi Kanagawa-ken (JP)**  
Inventor: **Morita, Mikio, c/o Tokyo Shibaura Denki K.K. 72, Horikawa-cho, Saiwai-ku Kawasaki-shi Kanagawa-ken (JP)**  
Inventor: **Arima, Itsuo, c/o Tokyo Shibaura Denki K.K. 72, Horikawa-cho, Saiwai-ku Kawasaki-shi Kanagawa-ken (JP)**

Designated Contracting States: **DE FR GB SE**

Representative: **Hansen, Bernd, Dr.rer.nat. et al, Hoffmann, Eitle & Partner Patentanwälte Arabellastrasse 4, D-8000 München 81 (DE)**

**Magnetic core and method of producing the same.**

Disclosed is a magnetic core comprising a molded product made of an iron powder and/or an iron alloy magnetic powder having a mean particle size of 10 to 100  $\mu\text{m}$ , and 1.5 to 40%, as a total amount in terms of volume ratio, of an insulating binder resin and an insulating inorganic compound powder. Also disclosed is a useful method of producing the magnetic core.

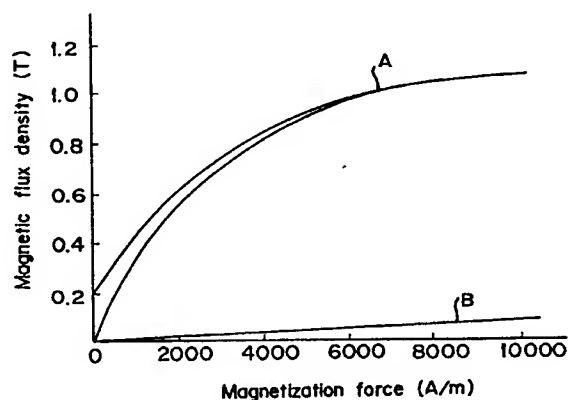

**EP 0 112 577 A1**

- 1 -

Magnetic core and method of producing the sameBACKGROUND OF THE INVENTION

5 This invention relates to an magnetic core, more particularly to an magnetic core which is excellent in the frequency characteristic of magnetic permeability and also has a high magnetic flux density. It also relates to a method of producing the magnetic core.

10 In the prior art, in electrical instruments such as an electric power converting device, including a device for converting an alternate current to a direct current, a device for converting an alternate current having a certain frequency to another alternate current having a different frequency and a device for converting a direct current to an alternate current such as so called  
15 inverter, or a non-contact breaker, etc., there have been employed, as electrical circuit constituent elements thereof, semiconductor switching elements, typically thyristor and transistor, and reactors for relaxation of turn-on stress in a semiconductor switching element,  
20 reactors for forced comutation, reactors for energy

accumulation or transformers for matching connected to these elements.

As an example of such electric power converting devices, Fig. 1 shows an electrical circuit of a device for converting a direct current to an alternate current. The electric power converting device as shown in Fig. 1 is constituted of a thyristor 1, a reactor for relaxation of turn-on stress of semiconductor switching element 2 and a transformer for matching 3. Numeral 4 designates load on alternate current and numeral 5 a direct current power source.

Through these reactors or transformers, a current containing a high frequency component reaching 100 KHz or higher, even to the extent over 500 KHz in some cases, may sometimes pass on switching of the semiconductors.

As the magnetic core constituting such a reactor or a transformer, there have been employed in the prior art such materials as shown below. That is, there may be mentioned:

- (a) a laminated magnetic core produced by laminating thin electromagnetic steel plates or permalloy plates having applied interlayer insulations;
- (b) a so-called dust core produced by caking carbonyl iron minute powder or permalloy minute powder with the use of, for example, a resin such as a phenolic resin; or
- (c) a so-called ferrite core produced by sintering an oxide type magnetic material.

Among these, a laminated magnetic core, while it exhibits excellent electric characteristics at a commercial frequency band, is marked in iron loss of the magnetic core at higher frequency band, particularly increased eddy-current loss in proportion to the square of a

frequency. It has also the property that the magnetizing power can resist change at inner portions farther from the surface of plate materials constituting the magnetic core because of the eddy-current of the magnetic core material.

5 Accordingly, a laminated magnetic core can be used only at a magnetic flux density by far lower than the saturated magnetic flux density inherently possessed by the magnetic core material itself, and there is also involved the problem of a very great eddy-current loss. Further, a

10 laminated magnetic core has a problem of extremely lower effective magnetic permeability relative to higher frequency, as compared with that relative to commercial frequency. When a laminated magnetic core having these problems is to be used in a reactor, a transformer, etc.

15 connected to a semiconductor switching element through which a current having a high frequency component passes, the magnetic core itself must be made to have great dimensions to compensate for effective magnetic permeability and magnetic flux density, whereby, also

20 because of lower effective magnetic permeability, there is also involved the problem of increased copper loss.

On the other hand, there is employed as the magnetic core material a compressed powdery magnetic body called as dust core, as described in detail in, for example, Japanese

25 Patent No.112235. However, such dust cores generally have considerably lower values of magnetic flux and magnetic permeability. Among them, even a dust core using carbonyl iron powder having a relatively higher magnetic flux density has a magnetic flux density of only about 0.1 T

30 and a magnetic permeability of only about  $1.25 \times 10^{-5}$  H/m at a magnetizing force of 10000 A/m. Accordingly, in a reactor or a transformer using a dust core as the magnetic core material, the magnetic core must inevitably be made to have great dimensions, whereby there is involved the

35 problem of increased copper loss in a reactor or a

transformer.

Alternatively, a ferrite core employed in a small scale electrical instrument has a high resistivity value and a relatively excellent high frequency characteristic.

- 5 However, a ferrite core has a magnetic flux density as low as about 0.4 T at a magnetizing force of 10000 A/m, and the values of magnetic permeability and the magnetic flux density at the same magnetizing force are respectively varied by some ten percents at -40 to 120 °C, which is the  
10 temperature range useful for the magnetic core. For this reason, when a ferrite core is to be used as an magnetic core material for a reactor or a transformer connected to a semiconductor switching element, the magnetic core must be enlarged because of the small magnetic flux density.  
15 But, a ferrite core, which is a sintered product, can be produced with a great size only with difficulty and thus is not suitable as the magnetic core. Also, a ferrite core involves the problems of great copper loss caused by its low magnetic flux density, of its great characteristic  
20 change when applied for a reactor or a transformer due to the great influence by temperatures on magnetic permeability and magnetic flux density, and further of increased noise generated from the magnetic core due to the greater magnetic distortion, as compared with an  
25 silicon steel, etc.

- An object of this invention is to provide an magnetic core to be used for a reactor or a transformer connected to a semiconductor element, which has overcome the problems as described above, having an excellent frequency  
30 characteristic of magnetic permeability and a high magnetic flux density.

#### SUMMARY OF THE INVENTION

The magnetic core of this invention is a molded product

comprising a magnetic powder, a binder resin and an inorganic compound powder. More specifically, the magnetic core of the present invention comprises a molded product of either one or both of an iron powder and an iron alloy magnetic powder having a mean particle size of 10 to 100  $\mu\text{m}$ , and 1.5 to 40 %, as a total amount in terms of volume ratio, of insulating binder resin and insulating inorganic compound powder.

This invention will be described below in detail with reference to the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows an example of an electric circuit in a device for converting direct current to alternate current; Fig. 2 shows direct current magnetization curves in the magnetic core of this invention (Example 3) and a dust core of a prior art; and Fig. 3 shows a characteristic diagram representing the magnetic flux density of magnetic cores obtained in Example 13 of this invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The magnetic powder of iron and/or an iron alloy to be used in this invention is required to have a mean particle size of 100  $\mu$  or less. This is because the aforesaid magnetic powder has a resistivity of 10  $\mu\Omega\cdot\text{cm}$  to some ten  $\mu\Omega\cdot\text{cm}$  at the highest, and therefore in order to obtain sufficient magnetic core material characteristics even in an alternate current containing high frequencies yielding skin effect, the magnetic powder must be made into minute particles, thereby to have the particles from their surfaces to inner portions contribute sufficiently to magnetization. However, if the mean particle size is

extremely small, namely less than 10  $\mu\text{m}$ , when molded at the molding stage as hereinafter described under a molding pressure of 10000 MPa or lower, the density of the resultant magnetic core will not sufficiently be large, resulting in an inconvenience of lowering of magnetic flux density. Consequently, in the present invention, the mean particle size of iron powder or iron alloy magnetic powder is set within the range from 10  $\mu\text{m}$  to 100  $\mu\text{m}$ .

Referring now to the relation between the mean particle size (D  $\mu\text{m}$ ) of these powders and resistivity thereof ( $\rho\mu\Omega\cdot\text{cm}$ ), it is preferred to satisfy the relation of  $\rho/D^2 \geq 4 \times 10^{-3}$  as represented by only the values of D and  $\rho$ .

The iron powder or iron alloy magnetic powder is not particularly limited, but any desired powder may be available, so long as it can satisfy the various parameters as mentioned above, including, for example, powder of pure iron, Fe-Si alloy powder, typically Fe-3%Si alloy powder, Fe-Al alloy powder, Fe-Si-Al alloy powder, Fe-Ni alloy powder, Fe-Co alloy powder and the like, and each one or suitable combination of these can be employed.

The insulating binder resin to be used in this invention has the function of a binder to bind the particles of the aforesaid iron powder or iron alloy magnetic powder, simultaneously with insulation of the particles of the iron powder or iron alloy magnetic powder from each other by coating of the surfaces thereof, thereby imparting sufficient effective resistivity value for alternate current magnetization to the magnetic core as a whole. As such binder resins, there may be included various thermosetting and thermoplastic resins such as epoxy resins, polyamide resins, polyimide resins, polyester resins, polycarbonate resins, polyacetal resins, polysulfone resins, polyphenylene oxide resins and the

like, and each one or a suitable combination of these resins may be used.

On the other hand, the powder of an insulating inorganic compound also fulfills the function of enhancing the effective resistivity value for alternate current magnetization to the magnetic core as a whole by existing among the particles of the iron conductive powder or iron alloy magnetic powder, simultaneously with enhancement of molding density of the magnetic core through reduction of frictional resistance between the particles of the iron powder or iron alloy magnetic powder during molding of the magnetic core. As such inorganic compounds, there may be included calcium carbonate, silica, magnesia, alumina, hematite, mica, various glasses or a suitable combination thereof. Of course, these inorganic compounds are required to be not reactive with the above-mentioned iron powder or iron alloy magnetic powder and the binder resin.

As to the mean particle size of the inorganic compound powder, it is preferably  $1/5$  or less of the mean particle size of the iron powder or iron alloy magnetic powder, namely, it is  $20\text{ }\mu\text{m}$  or less) in view of its dispersibility as well as the relation to the characteristics of the magnetic core material.

In the magnetic core of this invention, the total amount of the binder resin and the inorganic compound powder, relative to the whole volume, should be set at the range of from 1.5 to 40 %. When the volume ratio is less than 1.5 %, the molding density of the magnetic core cannot be enhanced and the effective resistivity value is also lowered. On the other hand, in excess of 40 %, the increasing tendency of the effective resistivity value will reach the saturated state, and further the molding density is lowered to result also in lowering of the



saturated magnetic flux density, whereby the magnetic flux density under a magnetization force of 10000 A/m will become similar to that of ferrite.

5 To mention the volume ratio mutually between the binder resin and the inorganic compound powder, the ratio of the former to the latter may be 98 to 20 vol. % : 2 to 80 vol.%, preferably 95 to 30 vol.% : 5 to 70 vol.%.

10 The magnetic core of this invention may be produced, for example, as follows. That is, predetermined amounts of the three components of i) iron powder, iron alloy magnetic powder or a mixture thereof, ii) binder resin and  
15 iii) inorganic compound powder are sufficiently mixed by a mixer and the resultant mixture is then compression molded in a mold. The molding pressure applied may be generally 1000 MPa or lower. If necessary, a heat treatment at a temperature of about 30 to 300 °C may also be applied on the molded product for curing of the binder resin.

Alternatively, as a preferred embodiment of the method, the above steps for mixing the iron powder and/or the iron  
20 alloy magnetic powder may be carried out by first mixing the insulating inorganic compound powder with the resin to prepare a powdery product which is used as a powdery binder, and then mixing the powdery binder with the iron powder and/or the iron alloy magnetic powder. Therafter  
25 the compression molding and the optional heat treatment may be carried out to produce the magnetic core.

Accordingly, in the above preferred embodiment, the method of producing an magnetic core according to this invention comprises a step of preparing a binder by mixing an  
30 insulating inorganic compound powder with a resin, a step of grinding said binder into a powder to prepare a powdery binder, and a step of mixing and compression molding said

powdery binder with iron powder, iron alloy magnetic powder or a mixture thereof.

According to this method, the powdery binder is held homogeneously among the particles of the magnetic powder  
5 when the powdery binder is mixed with the magnetic powder of iron or iron alloy magnetic material. When the mixture is further compression molded, the inorganic compound powder having been homogeneously compounded in the powdery binder plays role as a carrier for introducing the resin  
10 into the spaces formed among the particles, whereby the resin is very homogeneously dispersed among the particles of the magnetic powder. As a result, a thin insulating layer can be surely formed among the particles and therefore it becomes possible to produce an magnetic core  
15 having large resistivity, namely, having large magnetic flux density and excellent frequency characteristic of magnetic permeability.

Moreover, the inorganic compound powder and the resin which have been effectively held among the particles of  
20 the magnetic powder may decrease the frictional resistance between the particles, whereby it becomes possible to enhance the space factor of the particles of the magnetic powder even under molding pressure of not more than 1000 MPa, preferably 100 to 1000 MPa, which is readily  
25 utilizable in an industrial field. An magnetic core having higher magnetic flux density can therefore be produced.

This invention will be described in greater detail by the following Examples.

30 Examples 1 - 7

Various kinds of magnetic powder, inorganic powder, having

different mean particle sizes, and binder resins were formulated at the ratios (vol.%) indicated in Table 1, and these were sufficiently mixed. Each of the resultant mixtures was filled in a mold for molding of magnetic core, in which compression molding was carried out under various prescribed pressures to a desired shape. The molded product was subjected to heat treatment for curing of the binder resin to provide an magnetic core.

For these magnetic cores, density, magnetic flux density under magnetization force of 10000 A/m were measured, and further effective resistivity was calculated from the eddy-current loss of the magnetic core relative to alternate current magnetization.

For comparison, also produced were those using the materials having compositional proportions outside this invention (Comparative examples 1 and 2), those containing no inorganic compound powder (Comparative example 3) and those using magnetic powder of mean particle sizes outside this invention (Comparative examples 4 and 5).

Results are summarized in Table 1.

Table 1

Example No.	Components formulated							
	Magnetic powder			Inorganic compound powder			Binder resin	
	Kind	Mean particle size( $\mu$ m)	Formulated ratio (vol. %)	Kind	Mean particle size( $\mu$ m)	Formulated ratio (vol. %)	Kind	Formulated ratio (vol. %)
1	Fe-0.5Si	37 - 50	98.4	CaCO <sub>3</sub>	2.7	0.08	Epoxy	1.52
2	"	"	90.0	"	"	2.0	"	8.0
3	"	"	80.0	"	"	12.0	"	8.0
4	"	"	65.0	"	"	20.0	"	15.0
5	Fe-4.5Si	53 - 63	75.0	Alumina	5.7	5.0	Epoxy	20.0
6	Fe	44.7	98.4	Silica	0.17	0.1	Poly-amide	1.5
7	"	100	"	"	"	"	"	"
Comparative example								
1	Fe-0.5Si	37 - 50	99.0	CaCO <sub>3</sub>	2.7	0.08	Epoxy	0.92
2	"	"	55.0	"	"	5.0	"	40.0
3	Fe-4.5Si	53 - 63	75.0	-	-	-	Epoxy	25.0
4	Fe	150	98.4	Silica	0.17	0.1	Poly-amide	1.5
5	"	250	"	"	"	"	"	"

(Continuing laterally to next page)

0112577

0112577

Table 1 (Cont'd)

Example No.	Molding pressure (MPa)	Heating condition (°C, hr)	Characteristics of magnetic core		
			Density (g/cm <sup>3</sup> )	Magnetic flux density (T:Hm= 10000A/m)	Effective resistivity (mΩ·cm)
1	600	200, 1	7.4	1.44	80
2	"	"	7.0	1.22	280
3	"	"	6.5	1.12	430
4	"	"	5.4	0.66	540
5	800	200, 1	6.1	0.78	550
6	500	150, 1	7.4	1.44	70
7	"	"	7.4	1.46	22
Comparative example					
1	600	200, 1	7.4	1.42	15
2	"	"	4.7	0.37	600
3	800	200, 1	5.7	0.66	540
4	500	160, 1	7.4	1.44	6
5	"	"	7.4	1.46	5

When the magnetic cores of Examples 1 to 4 were subjected to measurements of changes in magnetic permeability and magnetic flux density at temperatures of from -40 to 120°C, the percent changes obtained were all less than 10 %.

- 5 Fig. 2 shows direct current magnetization curves representing changes in magnetic flux density for respective magnetizing forces, which were determined for the direct magnetization characteristic of the magnetic core of Example 3 and the magnetic core comprising the  
10 dust core of the prior art. It was confirmed that the magnetic core of this invention (curve A) was excellent, having higher magnetic flux density, as compared with the magnetic core of the prior art (curve B).

Examples 8 - 11

- 15 Mixtures prepared by mixing 84 vol. % of iron powders or iron alloy magnetic powders having different resistivities ( $\rho$ ) and mean particle sizes (D), 1 vol. % of an alumina powder having a mean particle size of 1  $\mu$ m or less and 15  
20 vol. % of an epoxy resin were each molded under a pressure of 600 MPa, and heat treatment was applied on each product at 200 °C for 1 hour to provide an magnetic core.

- For these magnetic cores, effective magnetic permeabilities at 1 kHz to 500 kHz were measured, and the ratios were determined relative to the effective magnetic  
25 permeability at 1 kHz as the standard. The results are shown in Table 2 as the relation with  $\rho/D^2$ .

0112577

Table 2

Example	Iron or iron-based alloy powder*		$\rho/D^2$	Changes of effective magnetic permeability (1 kHz = 1)			
	Resistivity ( $\mu\Omega\cdot\text{cm}$ )	Mean particle size D $\mu\text{m}$		1 kHz	100 kHz	300 kHz	500 kHz
8	45	97	$4.78 \times 10^{-3}$	1	1.00	0.98	0.95
9	80	50	$3.2 \times 10^{-2}$	1	1.00	0.99	0.98
10	27	69	$5.67 \times 10^{-3}$	1	1.00	0.98	0.95
11	10	44	$5.17 \times 10^{-3}$	1	1.00	0.98	0.95
Comparative example							
6	45	115	$3.4 \times 10^{-3}$	1	0.98	0.90	0.86
7	10	53	$3.56 \times 10^{-3}$	1	0.98	0.89	0.77
8	10	97	$1.06 \times 10^{-3}$	1	0.97	0.78	0.64
9	27	105	$2.44 \times 10^{-3}$	1	0.98	0.89	0.84
10	laminated magnetic core of 25 $\mu$			1	0.8	0.62	0.36
	permalloy sheet						

\* Composition:

Example 8: Fe-3%Si	Comparative example 6: Fe-3%Si
" 9: Fe-6.5%Si	7: Pure iron
" 10: Fe-1.5%Si	8: "
" 11: Pure iron	9: Fe-1.5%Si

Example 12

A mixture prepared by mixing 40 vol.% of Fe-3Al powder having a mean particle size of 63  $\mu\text{m}$ , 10 vol.% of Fe-Ni powder having a mean particle size of 53  $\mu\text{m}$  or less, Fe  
5 powder having a mean particle size of 44  $\mu\text{m}$ , 0.8 vol.% of glass powder having a mean particle size of 8  $\mu\text{m}$  and 14.2 vol.% of a polyamide resin was compression molded under a pressure of 800 MPa, followed by heat treatment at 100  $^{\circ}\text{C}$  for 1 hour, to provide an magnetic core. This magnetic  
10 core was found to have an effective resistivity of 350  $\text{m}\Omega\cdot\text{cm}$ .

In the above Examples, when an polyimide resin or a polycarbonate resin was employed in place of the epoxy resin, or when other inorganic compounds such as magnesia  
15 were employed, the same results could also be obtained.

Example 13

Inorganic compound of  $\text{SiO}_2$  (silica) powder having mean particle size of 3  $\mu\text{m}$  was mixed into a solution of thermosetting resin of epoxy resin with the addition of an  
20 amine type binder, 4,4'-diaminodiphenylmethane (DDM) or m-phenylenediamine (MPD), which were kneaded under heating at 60 $^{\circ}\text{C}$  to 110 $^{\circ}\text{C}$  to prepare a binder comprising a mixture of the  $\text{SiO}_2$  powder and the epoxy resin. According to this procedure, prepared were 6 kinds of binders containing  
25 therein the silica powder in an amount of 5, 20, 30, 48, 65 and 80 % in terms of volume ratio, respectively.

After allowing the binders to stand until each of the epoxy resins contained therein assumed a half-cured state, these were subjected to extrusion processing and grinding  
30 processing to prepare powdery binders having particles sizes of 50 to 150  $\mu\text{m}$ .



Each of these six kinds of the powdery binders and Fe-1.8%Si alloy powder having mean particle size of 44  $\mu\text{m}$  to 63  $\mu\text{m}$  were mixed with each other in the ratio of 25 : 75 in parts by volume. Each of the powdery mixtures thus  
5 prepared was packed in a metallic mold and compression molded under pressure of 500 MPa, followed by heat treatment at 200°C for 1 hour to produce six kinds of magnetic cores.

Thereafter, values for the magnetic flux density of these  
10 six kinds of magnetic cores under the external magnetization field of 10000 AT/m were examined to obtain the results as shown in Fig. 3. In Fig. 3, abssisa is the ratios of the content of silica powder in the binder resin; the mark  $\Delta$  denotes a result of a comparative  
15 example where no silica powder is contained at all in the binder resin.

As is apparent from Fig. 3, the higher the ratio of the content of silica powder in the binder resin is, the better the magnetic flux dinsity is improved. This is  
20 because the frictional resistance between the particles of the magnetic powder decreases owing to the rolling action of the silica powder and the presence of the resin dispersed among the particles of the magnetic powder and, as a result, the space factor of the Fe-1.8%Si alloy  
25 powder in the magnetic core has been improved. Moreover, it has been found and confirmed that the magnetic cores thus produced have effective electrical resistivity of 500  $\text{m}\Omega\cdot\text{cm}$  or higher which is a remarkably improved value as compared with the resistivity (30  $\text{m}\Omega\cdot\text{cm}$  or lower) of  
30 coventional magnetic cores, and also have excellent high frequency characteristics.

Example 14

- Inorganic compound of  $\text{CaCO}_3$  powder having mean particle size of  $2\text{ }\mu\text{m}$  was mixed with a thermosetting resin of polyamide resin at the proportion of 25 % in terms of volume % relative to the resin, and the mixture was subjected to cooling processing and extrusion processing to prepare a binder in a solid form, which was then milled or ground to obtain a powdery binder having particle size of  $74\text{ }\mu\text{m}$  or less.
- 5
- 10 The powdery binder was then mixed with Fe-1.5%Si alloy powder having mean particle size of  $63\text{ }\mu\text{m}$ . According to these procedures, prepared were four kinds of mixed materials (Sample Nos. 1 to 4) containing therein the magnetic alloy powder in an amount of 55, 65, 98 and 99 %
- 15 in terms of volume ratio, respectively. (Sample Nos. 1 and 2 are comparative examples, however.)

- Thereafter, the mixed materials were compression molded under the pressure of 800 MPa, followed by heat treatment at a resin-softening temperature to produce the
- 20 corresponding four kinds of magnetic cores.

Values for the magnetic flux density of these magnetic cores under the external magnetization field of 10000 AT/m were examined to obtain the results as shown in Table 3.

Table 3

Sample No.	Binder resin (vol %)	Magnetic powder (vol %)	Magnetic flux density (T) ( $H_m=10000\text{ AT/m}$ )	Effective resistivity ( $\text{m}\Omega\cdot\text{cm}$ )
1	1.0	99	1.4	16
2	2.0	98	1.4	95
3	35	65	0.6	510
4	45	55	0.35	610

As is apparent from Table 3, the magnetic flux density of a core is lower than that in the case of a ferite core when the content of the binder in the magnetic core exceeds 40 %, while very high magnetic flux density can be  
5 obtained when the content is not more than 40 %. The effective resistivity of magnetic core is extremely lowered to a value partaining to conventional one when the above content is not more than 1.5 %, while it is confirmed that very high value can be obtained when the  
10 content is not less than 1.5 %.

Thus, it is possible to obtain magnetic cores suited for intended use by controlling the content of the binder in an magnetic core. . .

The inorganic compounds, the binder resin and the magnetic  
15 powder mentioned in the above are not limited to those used in the above Examples, but there may be used mica, alumia or the like.

As apparently seen from Examples, the magnetic core of this invention has a magnetic flux density by far greater  
20 than the magnetic core of ferrite core or the magnetic core of dust core of the prior art, and also has a high effective resistivity. Further, also when compared with the laminated magnetic core, the core of this invention is smaller in change of effective magnetic permeability at a  
25 frequency band region from 1 to 500 kHz, and its commercial value is great.

Claims:

1. An magnetic core, which comprises a molded product comprising;  
either one or both of an iron powder and an iron alloy magnetic powder having a mean particle size of 10 to 100  $\mu\text{m}$ ; and  
1.5 to 40 %, as a total amount in terms of volume ratio, of insulating binder resin and insulating inorganic compound powder.
2. The magnetic core according to Claim 1, wherein said iron powder or iron alloy magnetic powder, when its mean particle size is represented by  $D \mu\text{m}$  and its resistivity by  $\rho \mu\Omega \cdot \text{cm}$ , satisfies the relationship, when represented in terms of only the numerical values of  $\rho$  and  $D$ , of  $\rho/D^2 \geq 4 \times 10^{-3}$ .
3. The magnetic core according to Claim 1, wherein said inorganic compound powder has a mean particle size of 20  $\mu\text{m}$  or less.
4. The magnetic core according to Claim 1, wherein said iron powder or iron alloy magnetic powder is at least one selected from the group consisting of Fe powder, Fe-Si alloy powder, Fe-Al alloy powder, Fe-Si-Al alloy powder, Fe-Ni alloy powder and Fe-Co alloy powder.
5. The magnetic core according to Claim 1, wherein said insulating binder resin is at least one selected from the group consisting of epoxy resins, polyamide resins, polyimide resins, polyester resins, polycarbonate resins, polyacetal resins, polysulfone resins and polyphenylene oxide resins.
6. The magnetic core according to Claim 1, wherein said insulating inorganic compound powder is powder of at least

one compounds selected from the group consisting of calcium carbonate, silica, magnesia, alumina, red iron oxide and glass.

5 7. The magnetic core according to Claim 6, wherein said insulating inorganic compound powder has mean particle size of  $1/5$  or less of the mean particle size of the iron powder or iron alloy magnetic powder.

10 8. The magnetic core according to Claim 1, wherein the total amount of said binder resin and said inorganic compound powder ranges from 1.5 to 40 vol %.

9. The magnetic core according to Claim 8, wherein the ratio of said binder resin and said inorganic compound powder is 98 to 20 vol. % : 2 to 80 vol. %

15 10. A method of producing an magnetic core, which comprises a step of preparing a binder by mixing an insulating inorganic compound powder with a resin, a step of grinding said binder into a powder to prepare a powdery binder, and a step of mixing and compression molding said powdery binder with iron powder, iron alloy magnetic  
20 powder or a mixture thereof.

12. The method according to Claim 11, wherein the compression molding is carried out under the pressure of from 100 to 1000 MPa.

FIG.1


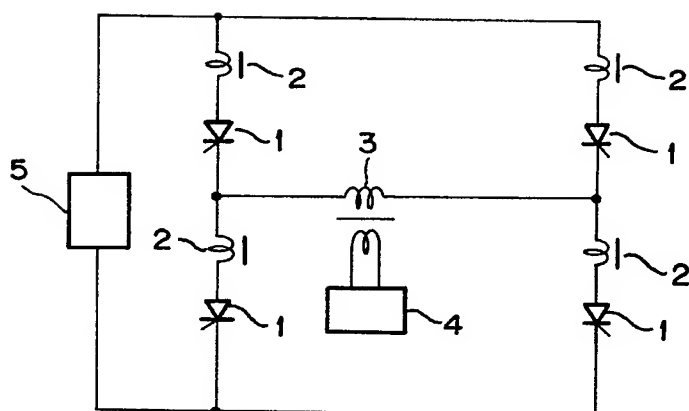


FIG.2

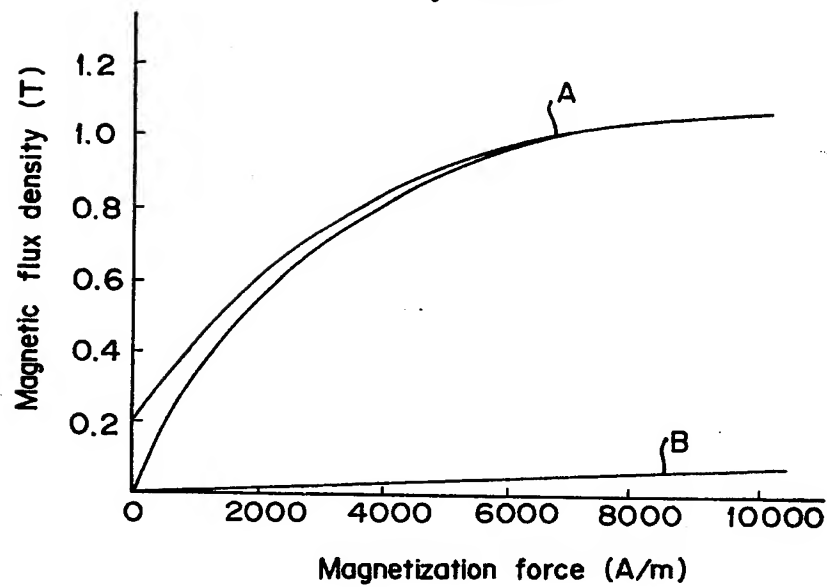


427-12-83

2/2

0112577

**FIG.3**

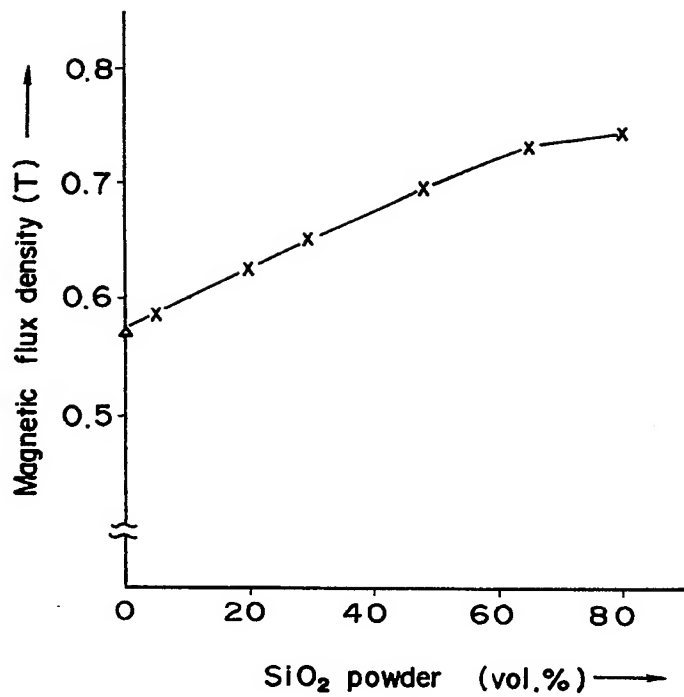

HOFFMANN · EITLE & PARTNER  
PATENT- UND RECHTSANWÄLTE


Hoffmann · Eitle & Partner, Arabellastraße 4, D-8000 München 81

To the  
European Patent Office  
Erhardtstr. 27

8000 München 2

UNSERE NR.:  
OUR FILE:

39 673 (u)wa



0112577  
PATENTANWÄLTE  
EUROPEAN PATENT ATTORNEYS


DR. ING. ERICH HOFFMANN (1930-1976)  
DIPL.-ING. WERNER EITLE  
DR. RER. NAT. KLAUS HOFFMANN  
DIPL.-ING. WERNER LEHN  
DIPL.-ING. KLAUS FUCHSLE  
DR. RER. NAT. BERND HANSEN  
DR. RER. NAT. HANS-ADOLF BRAUNS  
DIPL.-ING. KLAUS GORG  
DIPL.-ING. KARL KOHLMANN

RECHTSANWALT:  
ALEXANDER NETTE

ARABELLASTRASSE 4/VIII  
D-8000 MÜNCHEN 81

Datum February 7, 1984

Re.: Patent application No. 83 113\_121.4  
Tokyo Shibaura Denki Kabushiki Kaisha



Reference is made to a telephone conversation with the  
~~formalities officer~~  
~~search examiner~~ in The Hague. In connection herewith  
a new page 20 is attached in triplicate. Herein claim  
12 has been re-numbered to claim 11, which was a typing  
error. Please use this new page 20 for laying open do-  
cument.

The request for correction is allowed under  
R. 88 EPC / ~~with the exception of the deleted~~  
~~points~~.  
THE HAGUE, 20 FEB. 1984  
RECEIVING SECTION J. D. KORVING

Dr. Bernd Hansen  
*B. Hansen*  
European Patent  
Attorney

Encl.:

new page 20, 3-fold



one compounds selected from the group consisting of calcium carbonate, silica, magnesia, alumina, red iron oxide and glass.

5 7. The magnetic core according to Claim 6, wherein said insulating inorganic compound powder has mean particle size of  $1/5$  or less of the mean particle size of the iron powder or iron alloy magnetic powder.

10 8. The magnetic core according to Claim 1, wherein the total amount of said binder resin and said inorganic compound powder ranges from 1.5 to 40 vol %.

9. The magnetic core according to Claim 8, wherein the ratio of said binder resin and said inorganic compound powder is 98 to 20 vol. % : 2 to 80 vol. %

15 10. A method of producing an magnetic core, which comprises a step of preparing a binder by mixing an insulating inorganic compound powder with a resin, a step of grinding said binder into a powder to prepare a powdery binder, and a step of mixing and compression molding said powdery binder with iron powder, iron alloy magnetic  
20 powder or a mixture thereof.

11. The method according to Claim 10, wherein the compression molding is carried out under the pressure of from 100 to 1000 MPa.



European Patent  
Office

# EUROPEAN SEARCH REPORT

0112577  
Application number

EP 83113121.4

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 7)
Y	R. BOLL "Weichmagnetische Werkstoffe", 3rd edition, 1977 VACUUMSCHMELZE GMBH, Hanau pages 43-49  * Page 45, fig. 3.2; page 49, section 3.5, schedule 3.4 *	1-9	H 01 F 1/26 H 01 F 41/02
Y	GB - A - 403 368 (JOHNSON)  * Claims 1,7,10; page 2, line 108 - page 3, line 66; fig. 1-3 *	1-9	
A	US - A - 3 602 986 (CONWICKE)  * Totality *	1,5,8, 9	
A	DE - A1 - 2 628 207 (DRALORIC)  * Totality *	1,10, 11	TECHNICAL FIELDS SEARCHED (Int. Cl. 7)
A,P	EP - A1 - 0 087 781 (KABUSHIKI)  * Page 5, line 2 - page 7, line 11; claims 1-10 *	1-9	B 22 F 9/00 C 22 C 33/00 C 22 C 38/00 H 01 F 1/00 H 01 F 3/00 H 01 F 41/00
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 26-03-1984	Examiner PIRKER
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons  & : member of the same patent family, corresponding document	